

# Model WIC 1 | Walk-in-chambers for Stability Testing and Storage

The walk-in-chambers offer a wide range of features and benefits to perfectly meet requirements in stability testing. Perfect test conditions are maintained in a wide range of temperature from 10 °C to 50 °C and relative humidity of 20% to 90% RH.



Model

## MAIN FEATURES

- Relative humidity accuracy of  $\pm 2.5\%$
- Temperature accuracy of  $\pm 1.5\text{ °C}$
- Duct work for proper distribution of air
- Highly insulated room panels with U value of only  $0,21\text{ W/m}^2\text{K}$
- LED Lighting with motion detector
- High quality room elements, made in Germany
- Interior completely stainless steel
- Exterior service accessibility
- Room Elements: Galvanized sheet steel, polyester coated, white, similar to RAL 9010, interior surfaces in stainless steel, 4 inch / 100 mm PU foam U value:  $0,21\text{ W/m}^2\text{K}$
- Floor: Floor overlay is chrome-nickel steel, pattern-rolled 5WL
- Surface load:  $50.000\text{ N/m}^2$

## ORDERING INFORMATION


Interior volume [L]	Voltage	Option model	Version	Art.-No.
	V 1~ ph 50 Hz	Standard	WIC1-230V	9800-0011
	V 1~ ph 60 Hz	Standard	WIC1-208V	9800-0001
		with conditioner on ceiling	WIC1C-208V	9800-0002

## TECHNICAL DATA


Description	WIC1-230V	WIC1-208V	WIC1C-208V
Article Number	9800-0011	9800-0001	9800-0002
<b>Performance Data Climate</b>			
Temperature range [°C]	5...50	5...50	5...50
Temperature variation at 25 °C and 60 % RH [ $\pm$ K]	1.5	1.5	1.5
Temperature variation at 40 °C and 75 % RH [ $\pm$ K]	1.5	1.5	1.5
Temperature fluctuation at 25 °C and 60 % RH [ $\pm$ K]	0.5	0.5	0.5
Temperature fluctuation at 40 °C and 75 % RH [ $\pm$ K]	0.5	0.5	0.5
Humidity range	20...93	20...93	20...93
Humidity fluctuation at 25 °C and 60 % RH	2.5 $\pm$ % RH	2.5 $\pm$ % RH	2.5 $\pm$ % RH
Humidity fluctuation at 40 °C and 75 % RH	2.5 $\pm$ % RH	2.5 $\pm$ % RH	2.5 $\pm$ % RH
<b>Electrical data</b>			
Power frequency [Hz]	50	60	60
Nominal power [kW]	2.7	2.7	2.7
Unit fuse [A]	20	20	20
Phase (Nominal voltage)	1~	1~	1~
<b>Measures</b>			
Net weight of the unit (empty) [kg]	776	776	776

Description	WIC1-230V	WIC1-208V	WIC1C-208V
Article Number	9800-0011	9800-0001	9800-0002
Internal Dimensions			
Interior width [mm]	2400	2400	2400
Interior height [mm]	2270	2270	2270
Interior depth [mm]	2300	2300	2300

**DIMENSIONS incl. fittings and connections [mm]**



**CHARTS**

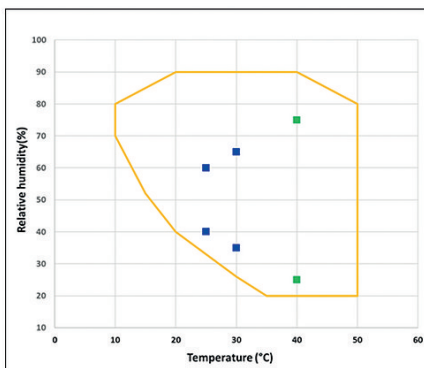

Climate chart

**ACCESSORIES**

Designation	Description	*	Art.-No.
Ramp for all WIC models	suitable for all WIC models	-	8012-2239
Shelf set small	suitable for WIC 1, WIC 1 C	-	8012-2240 8012-2156

\* Notes › See last page

## SERVICES

Designation	Description	*	Art.-No.
Installation services			
Maintenance services			
Validation services			
Calibration services			
Execution of IQ/OQ	Execution of IQ/OQ in accordance with qualification folder	05	DL40-0200
Installation and Commissioning	Installation and Commissioning	-	DL10-0800
Maintenance	One-off maintenance service in accordance with maintenance schedule. Visual inspection of mechanical and electrical components, testing of all key functions. Calibration of a test temperature specified by the user in center of usable space without certificate	05	DL20-1000
Temperature and humidity measurement, 13-1 measuring points	Temperature measurement with 13 temperature measuring points and 1 humidity measuring point in center of chamber with a pair of values specified by the user, including certificate	03, 04, 05	DL30-0113

\* Notes › See last page

## NOTES

- 01 Condensation may occur in the area around the access port. Access ports may be placed in custom locations for an additional charge.
- 02 UL mark is not granted when this option is used.
- 03 Sensor calibration is performed in an accredited calibration laboratory.
- 04 Calibration is performed according to the BINDER factory standard.
- 05 Quoted prices do not include travel costs. Please refer to the chapter on BINDER Service for travel costs for your region. Quoted prices for services performed in Switzerland do not include a country-specific added fee (available on request).

### **BINDER GmbH**

Tuttlingen, Germany  
TEL +49 7462 2005 0  
FAX +49 7462 2005 100  
info@binder-world.com  
www.binder-world.com

### **BINDER Asia Pacific (Hong Kong) Ltd.**

Kowloon, Hong Kong, P.R. China  
TEL +852 39070500  
FAX +852 39070507  
asia@binder-world.com  
www.binder-world.com

### **BINDER Environmental Testing Equipment (Shanghai) Co., Ltd.**

Shanghai, P.R. China  
TEL +86 21 685 808 25  
FAX +86 21 685 808 29  
china@binder-world.com  
www.binder-world.com

### **BINDER Inc.**

Bohemia, NY, USA  
TEL +1 631 224 4340  
FAX +1 631 224 4354  
usa@binder-world.com  
www.binder-world.us

# Model WIC 2 | Walk-in-chambers for Stability Testing and Storage

The walk-in-chambers offer a wide range of features and benefits to perfectly meet requirements in stability testing. Perfect test conditions are maintained in a wide range of temperature from 10 °C to 50 °C and relative humidity of 20% to 90% RH.



Model

## MAIN FEATURES

- Relative humidity accuracy of  $\pm 2.5\%$
- Temperature accuracy of  $\pm 1.5\text{ °C}$
- Duct work for proper distribution of air
- Highly insulated room panels with U value of only  $0,21\text{ W/m}^2\text{K}$
- LED Lighting with motion detector
- High quality room elements, made in Germany
- Interior completely stainless steel
- Exterior service accessibility
- Room Elements: Galvanized sheet steel, polyester coated, white, similar to RAL 9010, interior surfaces in stainless steel, 4 inch / 100 mm PU foam U value:  $0,21\text{ W/m}^2\text{K}$
- Floor: Floor overlay is chrome-nickel steel, pattern-rolled 5WL
- Surface load:  $50.000\text{ N/m}^2$

## ORDERING INFORMATION


Interior volume [L]	Voltage	Option model	Version	Art.-No.
	V 1~ ph 50 Hz	Standard	WIC2-230V	9800-0012
	V 1~ ph 60 Hz	Standard	WIC2-208V	9800-0003
		with conditioner on ceiling	WIC2C-208V	9800-0004

## TECHNICAL DATA


Description	WIC2-230V	WIC2-208V	WIC2C-208V
<b>Article Number</b>	<b>9800-0012</b>	<b>9800-0003</b>	<b>9800-0004</b>
<b>Performance Data Climate</b>			
Temperature range [°C]	5...50	5...50	5...50
Temperature variation at 25 °C and 60 % RH [ $\pm$ K]	1.5	1.5	1.5
Temperature variation at 40 °C and 75 % RH [ $\pm$ K]	1.5	1.5	1.5
Temperature fluctuation at 25 °C and 60 % RH [ $\pm$ K]	0.5	0.5	0.5
Temperature fluctuation at 40 °C and 75 % RH [ $\pm$ K]	0.5	0.5	0.5
Humidity range	20...93	20...93	20...93
Humidity fluctuation at 25 °C and 60 % RH	2.5 $\pm$ % RH	2.5 $\pm$ % RH	2.5 $\pm$ % RH
Humidity fluctuation at 40 °C and 75 % RH	2.5 $\pm$ % RH	2.5 $\pm$ % RH	2.5 $\pm$ % RH
<b>Electrical data</b>			
Power frequency [Hz]	50	60	60
Nominal power [kW]	2.7	2.7	2.7
Unit fuse [A]	20	20	20
Phase (Nominal voltage)	1~	1~	1~
<b>Measures</b>			
Net weight of the unit (empty) [kg]	981	981	981

Description	WIC2-230V	WIC2-208V	WIC2C-208V
Article Number	9800-0012	9800-0003	9800-0004
Internal Dimensions			
Interior width [mm]	2400	2400	2400
Interior height [mm]	2270	2270	2270
Interior depth [mm]	3400	3400	3400

**DIMENSIONS incl. fittings and connections [mm]**

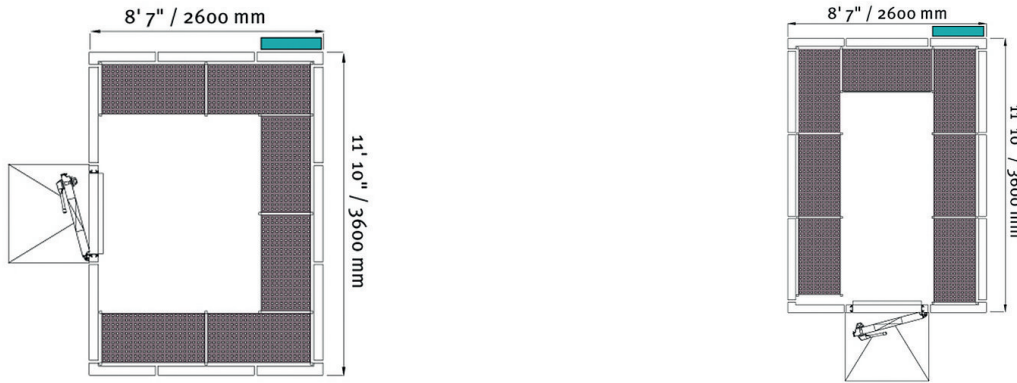

**CHARTS**

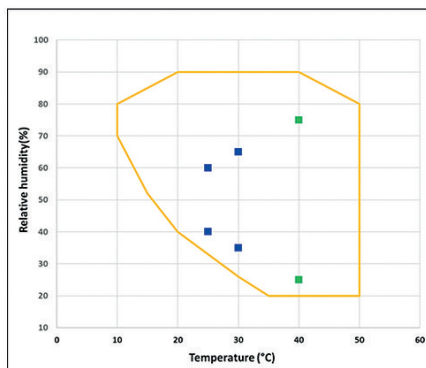

Climate chart

**ACCESSORIES**

Designation	Description	*	Art.-No.
Ramp for all WIC models	suitable for all WIC models	-	8012-2239
Shelf set middle	suitable for WIC 2, WIC 2 C	-	8012-2241 8012-2157

\* Notes › See last page

## SERVICES

Designation	Description	*	Art.-No.
Installation services			
Maintenance services			
Validation services			
Calibration services			
Execution of IQ/OQ	Execution of IQ/OQ in accordance with qualification folder	05	DL40-0200
Installation and Commissioning	Installation and Commissioning	-	DL10-0800
Maintenance	One-off maintenance service in accordance with maintenance schedule. Visual inspection of mechanical and electrical components, testing of all key functions. Calibration of a test temperature specified by the user in center of usable space without certificate	05	DL20-1000
Temperature and humidity measurement, 13-1 measuring points	Temperature measurement with 13 temperature measuring points and 1 humidity measuring point in center of chamber with a pair of values specified by the user, including certificate	03, 04, 05	DL30-0113

\* Notes › See last page

## NOTES

- 01 Condensation may occur in the area around the access port. Access ports may be placed in custom locations for an additional charge.
- 02 UL mark is not granted when this option is used.
- 03 Sensor calibration is performed in an accredited calibration laboratory.
- 04 Calibration is performed according to the BINDER factory standard.
- 05 Quoted prices do not include travel costs. Please refer to the chapter on BINDER Service for travel costs for your region. Quoted prices for services performed in Switzerland do not include a country-specific added fee (available on request).

### **BINDER GmbH**

Tuttlingen, Germany  
TEL +49 7462 2005 0  
FAX +49 7462 2005 100  
info@binder-world.com  
www.binder-world.com

### **BINDER Asia Pacific (Hong Kong) Ltd.**

Kowloon, Hong Kong, P.R. China  
TEL +852 39070500  
FAX +852 39070507  
asia@binder-world.com  
www.binder-world.com

### **BINDER Environmental Testing Equipment (Shanghai) Co., Ltd.**

Shanghai, P.R. China  
TEL +86 21 685 808 25  
FAX +86 21 685 808 29  
china@binder-world.com  
www.binder-world.com

### **BINDER Inc.**

Bohemia, NY, USA  
TEL +1 631 224 4340  
FAX +1 631 224 4354  
usa@binder-world.com  
www.binder-world.us



# Model WIC 3 | Walk-in-chambers for Stability Testing and Storage

The walk-in-chambers offer a wide range of features and benefits to perfectly meet requirements in stability testing. Perfect test conditions are maintained in a wide range of temperature from 10 °C to 50 °C and relative humidity of 20% to 90% RH.



Model

## MAIN FEATURES

- Relative humidity accuracy of  $\pm 2.5\%$
- Temperature accuracy of  $\pm 1.5\text{ °C}$
- Duct work for proper distribution of air
- Highly insulated room panels with U value of only  $0,21\text{ W/m}^2\text{K}$
- LED Lighting with motion detector
- High quality room elements, made in Germany
- Interior completely stainless steel
- Exterior service accessibility
- Room Elements: Galvanized sheet steel, polyester coated, white, similar to RAL 9010, interior surfaces in stainless steel, 4 inch / 100 mm PU foam U value:  $0,21\text{ W/m}^2\text{K}$
- Floor: Floor overlay is chrome-nickel steel, pattern-rolled 5WL
- Surface load:  $50.000\text{ N/m}^2$

## ORDERING INFORMATION



Interior volume [L]	Voltage	Option model	Version	Art.-No.
	V 1~ ph 50 Hz	Standard	WIC3-230V	9800-0013
	V 1~ ph 60 Hz	Standard	WIC3-208V	9800-0007
		with conditioner on ceiling	WIC3C-208V	9800-0008

## TECHNICAL DATA


Description	WIC3-230V	WIC3-208V	WIC3C-208V
<b>Article Number</b>	<b>9800-0013</b>	<b>9800-0007</b>	<b>9800-0008</b>
<b>Performance Data Climate</b>			
Temperature range [°C]	5...50	5...50	5...50
Temperature variation at 25 °C and 60 % RH [ $\pm$ K]	1.5	1.5	1.5
Temperature variation at 40 °C and 75 % RH [ $\pm$ K]	1.5	1.5	1.5
Temperature fluctuation at 25 °C and 60 % RH [ $\pm$ K]	0.5	0.5	0.5
Temperature fluctuation at 40 °C and 75 % RH [ $\pm$ K]	0.5	0.5	0.5
Humidity range	20...93	20...93	20...93
Humidity fluctuation at 25 °C and 60 % RH	2.5 $\pm$ % RH	2.5 $\pm$ % RH	2.5 $\pm$ % RH
Humidity fluctuation at 40 °C and 75 % RH	2.5 $\pm$ % RH	2.5 $\pm$ % RH	2.5 $\pm$ % RH
<b>Electrical data</b>			
Power frequency [Hz]	50	60	60
Nominal power [kW]	2.7	2.7	2.7
Unit fuse [A]	20	20	20
Phase (Nominal voltage)	1~	1~	1~
<b>Measures</b>			
Net weight of the unit (empty) [kg]	1186	1186	1186

Description	WIC3-230V	WIC3-208V	WIC3C-208V
Article Number	9800-0013	9800-0007	9800-0008
Internal Dimensions			
Interior width [mm]	2400	2400	2400
Interior height [mm]	2270	2270	2270
Interior depth [mm]	4700	4700	4700

**DIMENSIONS incl. fittings and connections [mm]**

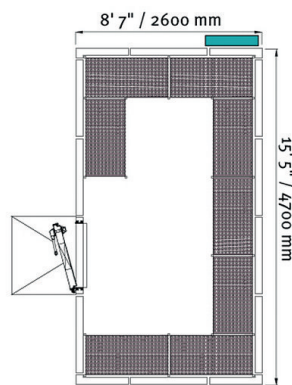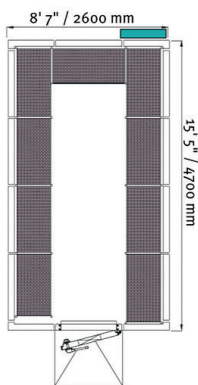

**CHARTS**

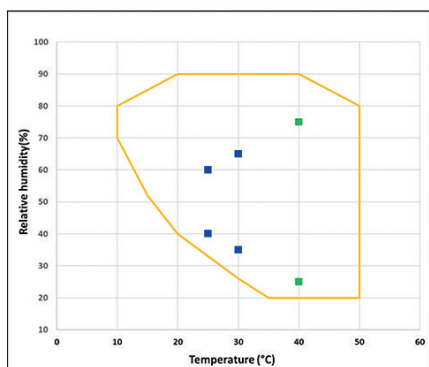

Climate chart

**ACCESSORIES**

Designation	Description	*	Art.-No.
Ramp for all WIC models	suitable for all WIC models	-	8012-2239
Shelf set large	suitable for WIC 3, WIC 3 C	-	8012-2242 8012-2158

\* Notes › See last page

## SERVICES

Designation	Description	*	Art.-No.
Installation services			
Maintenance services			
Validation services			
Calibration services			
Execution of IQ/OQ	Execution of IQ/OQ in accordance with qualification folder	05	DL40-0200
Installation and Commissioning	Installation and Commissioning	-	DL10-0800
Maintenance	One-off maintenance service in accordance with maintenance schedule. Visual inspection of mechanical and electrical components, testing of all key functions. Calibration of a test temperature specified by the user in center of usable space without certificate	05	DL20-1000
Temperature and humidity measurement, 13-1 measuring points	Temperature measurement with 13 temperature measuring points and 1 humidity measuring point in center of chamber with a pair of values specified by the user, including certificate	03, 04, 05	DL30-0113

\* Notes › See last page

## NOTES

- 01 Condensation may occur in the area around the access port. Access ports may be placed in custom locations for an additional charge.
- 02 UL mark is not granted when this option is used.
- 03 Sensor calibration is performed in an accredited calibration laboratory.
- 04 Calibration is performed according to the BINDER factory standard.
- 05 Quoted prices do not include travel costs. Please refer to the chapter on BINDER Service for travel costs for your region. Quoted prices for services performed in Switzerland do not include a country-specific added fee (available on request).

### **BINDER GmbH**

Tuttlingen, Germany  
TEL +49 7462 2005 0  
FAX +49 7462 2005 100  
info@binder-world.com  
www.binder-world.com

### **BINDER Asia Pacific (Hong Kong) Ltd.**

Kowloon, Hong Kong, P.R. China  
TEL +852 39070500  
FAX +852 39070507  
asia@binder-world.com  
www.binder-world.com

### **BINDER Environmental Testing Equipment (Shanghai) Co., Ltd.**

Shanghai, P.R. China  
TEL +86 21 685 808 25  
FAX +86 21 685 808 29  
china@binder-world.com  
www.binder-world.com

### **BINDER Inc.**

Bohemia, NY, USA  
TEL +1 631 224 4340  
FAX +1 631 224 4354  
usa@binder-world.com  
www.binder-world.us